
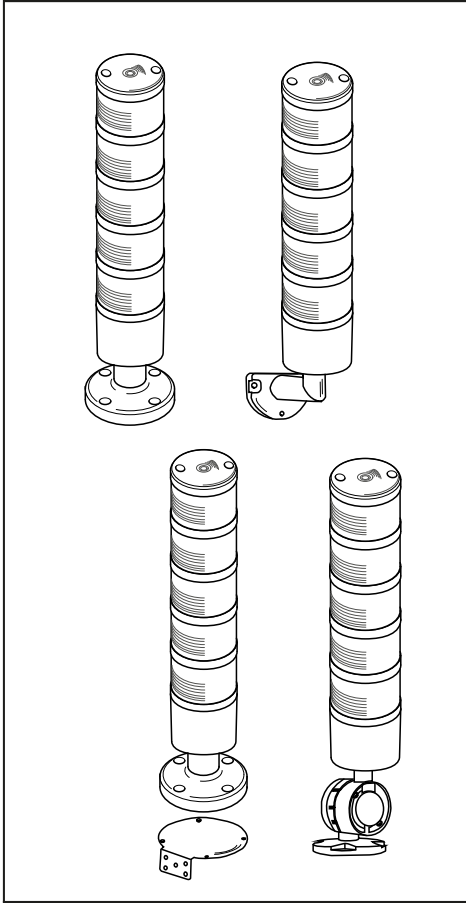


SNT - 70 SERİSİ / SERIES
MODEL: 7024 - 7012

MUCCO
WARNING LAMPS

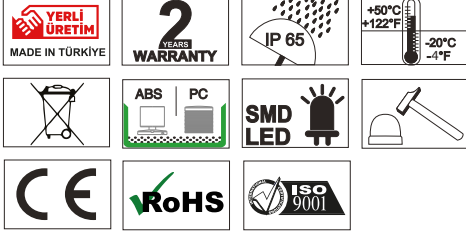


(TR)

- Ürünün bağlantısı en az elektrik teknisyenleri tarafından yapılmalıdır.
- Ürün iç ve dış mekanda kullanılabilir.
- Ürünün iç ve dış mekana uyumluluğu resimdeki gibidir.
- Ürün titreşim ve ısının en az olduğu yere montaj edilmelidir.

(EN)

- The electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat are minimal.

İÇ MEKAN / INDOOR



DIŞ MEKAN / OUTDOOR



SNT-7024-*** & SNT-7012-*** Model / Model

Kat / Layer	24V DC	220V AC
	Akım max (mA) Current max (mA)	Akım max (mA) Current max (mA)
1	100 mA	31 mA
2	170 mA	36 mA
3	250 mA	46 mA
4	330 mA	-
5	400 mA	-



Işık Modu / Light Pattern

P/N	Işık Modu Light Pattern	Melodi Melody
SNT-7024/7012-S/B***	Sabit / Steady	Sürekli / Continuous
SNT-7024/7012-F/B***	Flaşör / Flashing	Kesik Kesik / Intermittent
SNT-7024/7012-C/B***	Çakar / Strobe	Kesik Kesik / Intermittent
SNT-7024/7012-D/B***	Döner / Rotary	Kesik Kesik / Intermittent



Ses Şiddeti / Sound Intensity

Melodi/Melody	dist. at 10 cm	dist. at (1m)
M1	103 dB	92 dB
M2	105 dB	92 dB

*Değerler +/- 5% değişiklik gösterebilir.

*Values may vary by +/- 5%.



Ağırlık / Weight

Kat / Layer Renk/Color	SNT-7024-***	SNT-7012-***
1kat / 1layers 1 2 3 4 5	165-175 gr	195-205 gr
2kat / 2layers 1 2	225-235 gr	255-265 gr
3kat / 3layers 1 2 3	285-295 gr	315-325 gr
4kat / 4layers 1 2 3 4	345-355 gr	-
5kat / 5layers 1 2 3 4 5	405-415 gr	-

1 2 3 4 5

*** Işık Renklerini ifade eder.

1-Kırmızı / 2-Yeşil / 3-Sarı / 4-Mavi / 5-Beyaz

*** Indicates Light colors.


1-Red / 2-Green / 3-Yellow / 4-Blue / 5-White




Epilepsi hastalığı olanların kullanmaması önerilir.

It is recommended that people with epilepsy should not use it.

TEKNİK ÇİZİM
TECHNICAL DIAGRAM

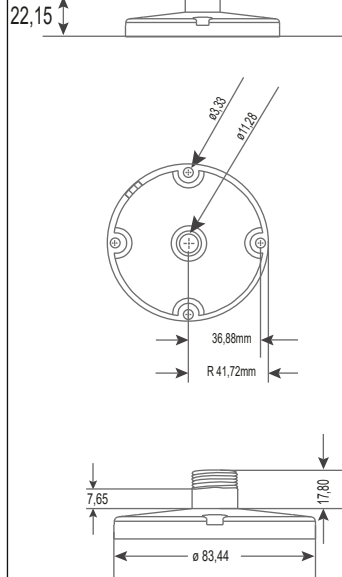

KABLO BAĞLANTI ŞEMASI
WIRING DIAGRAM
24V DC & 220V AC

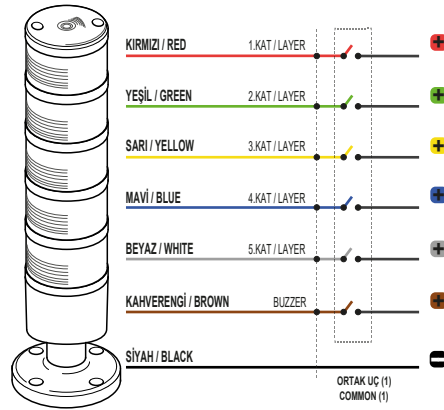

KABLOLAMA TALIMATLARI

WIRING INSTRUCTION



EN

- Each color-coded wire is connected to a switch that controls the LED for the corresponding layer.
- The black wire (COMMON) serves as the common connection for all layers.
- The 7024 Series products operate with **direct current (DC)**.
- The 7012 Series products operate with **alternating current (AC)**.

YEDEK PARÇALAR
SPARE PARTS

