
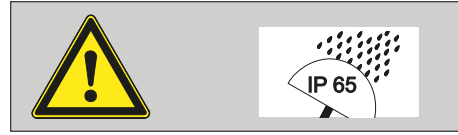


SNT - 70 SERİSİ / SERIES
MODEL: SNT-70A-F...-10U/20U/30U
SNT-70A-FB...-10U/20U/30U

MUCCO
WARNING LAMPS

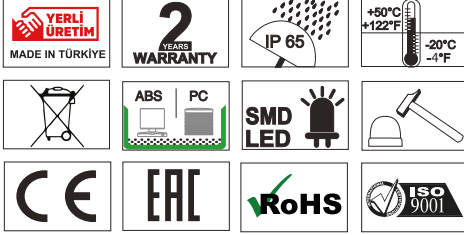


(TR)

- Ürünün bağlantısı en az elektrik teknisyenleri tarafından yapılmalıdır.
- Ürün iç ve dış mekanda kullanılabilir.
- Ürünün iç ve dış mekana uyumluluğu resimdeki gibidir.
- Ürün titreşim ve ısınin en az olduğu yere montaj edilmelidir.

(EN)

- The electrical connection is to be made by trained electrical specialists only.
- The product can be used indoors & outdoors.
- The interior & exterior compatibility of the product is like in the pictures below.
- The product should be installed where the vibration and heat are minimal.

İÇ MEKAN / INDOOR



DIŞ MEKAN / OUTDOOR



SNT-70A*** Model / Model

Voltaj / Power Supply	40-250V AC/DC	
P/N	Işık Modu Light Pattern	Melodi Melody
SNT-70A-S/B***	Sabit / Steady	Sürekli / Continuous
SNT-70A-F/B***	Flaşör / Flashing	Kesik Kesik / Intermittent
SNT-70A-C/B***	Çakar / Strobe	Kesik Kesik / Intermittent
SNT-70A-D/B***	Döner / Rotary	Kesik Kesik / Intermittent

1 2 3 4 5

*** Işık Renklerini ifade eder.

1-Kırmızı / 2-Yeşil / 3-Sarı / 4-Mavi / 5-Beyaz

*** Indicates Light colors.

1-Red / 2-Green / 3-Yellow / 4-Blue / 5-White



Ses Şiddeti / Sound Intensity

Melodi/Melody	dist. at 10 cm	dist. at (1m)
M1	103 dB	92 dB
M2	105 dB	92 dB

*Değerler +/- 5% değişiklik gösterebilir.

*Values may vary by +/- 5%.



Ağırlık / Weight

Kat / Layer Renk/Color	SNT***-10U	SNT***-20U	SNT***-30U
1kat / 1layers 1 2 3 4 5	660-670gr	680-690 gr	700-710 gr
2kat / 2layers 1 2	675-685 gr	695-705 gr	715-725 gr
3kat / 3layers 1 2 3	690-695 gr	710-720 gr	730-740 gr




Epilepsi hastalığı olanların kullanmaması önerilir.

It is recommended that people with epilepsy should not use it.


1

TEKNİK ÇİZİM TECHNICAL DIAGRAM

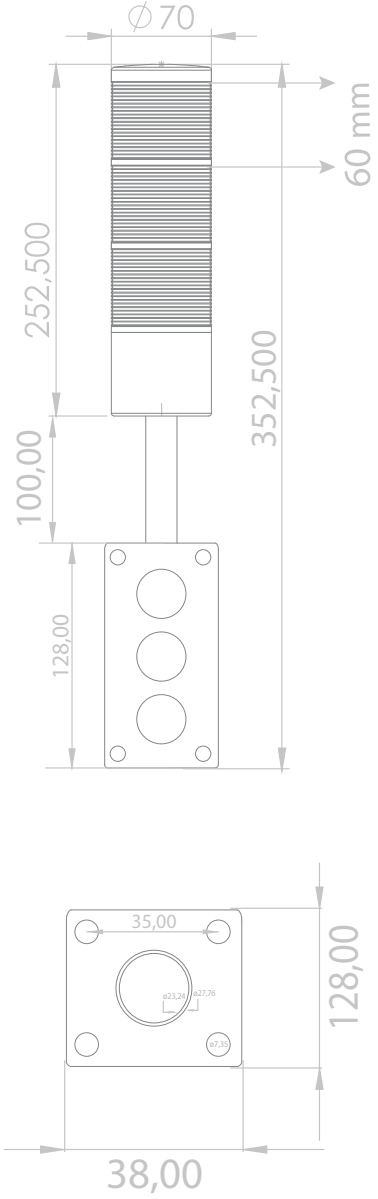


1

TEKNİK ÇİZİM TECHNICAL DIAGRAM

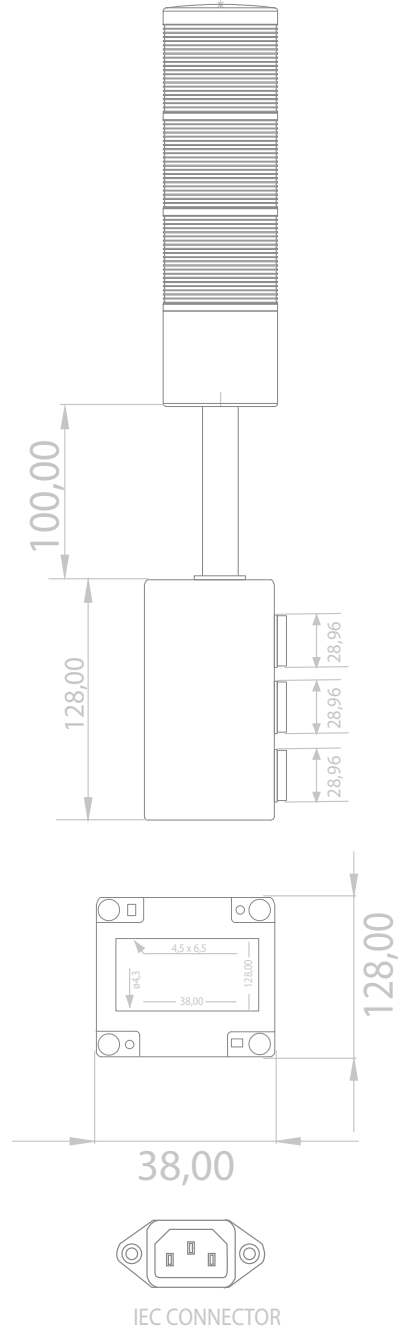

2

KABLOLAMA TALIMATLARI WIRING INSTRUCTION

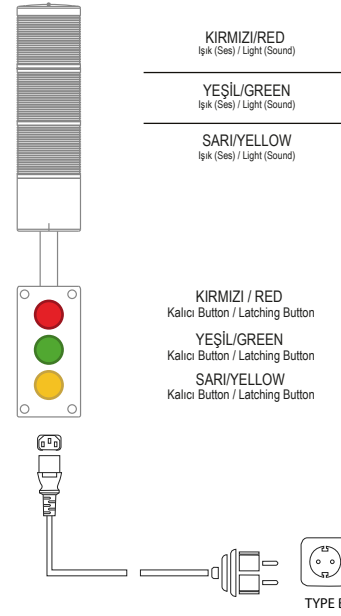

2a

İŞIK&MELODİ AYARI LIGHT&MELODY ADJUSTMENT



TR

- Ürün, 40-250V AC/DC gerilim aralığında çalışan bir güç kaynağı ile uyumludur.
- Ürün, Type B fiş tipi ile kullanılmak üzere tasarlanmıştır. Bağlantı yapmadan önce, priz tipinin uygunluğunu kontrol ediniz.
- Kat seçimi buton üzerinden gerçekleştirilir. Butona basıldığında, ilgili ışık (ve varsa sesli uyarı) aktif hale gelir. Aynı butona tekrar basıldığında, ilgili ışık ve sesli uyarı devre dışı kalır.

EN

- The product is compatible with a power supply operating within a voltage range of 40-250V AC/DC.
- The product is designed for use with Type B plug types. Ensure that the socket type is suitable before making a connection.
- Layer selection is performed via the button. Pressing the button activates the corresponding indicator light (and audible alert, if available). Pressing the button again deactivates the indicator light and audible alert.