



SNT - 95-SRB SERİSİ / SERIES
MODEL: 945-SRB

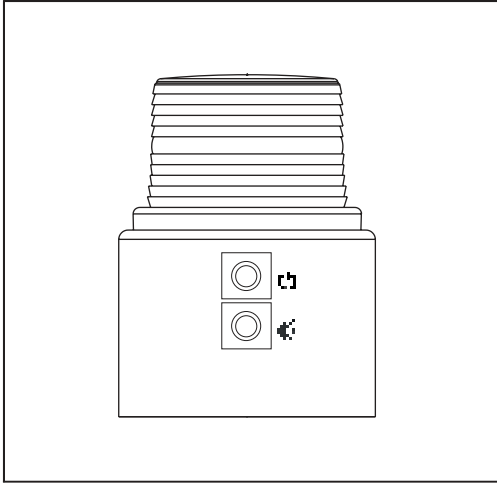

MUCCO
WARNING LAMPS

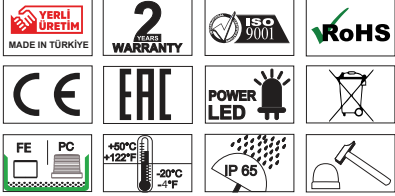


- Ürünün Bağlantısı En Az Elektrik Teknisyenleri Tarafından Yapılmalıdır.
- Ürün İç Ve Dış Mekanda Kullanılabilir.
- Ürünün İç Ve Dış Mekana Uyumluluğu Resimdeki Gibidir.
- Ürün Titreşim Ve Isının En Az Olduğu Yere Montaj Edilmelidir.

- Electrical connection must be carried out at least by trained electrical specialists.
- The product can be used indoors and outdoors.
- The interior and exterior compatibility of the product is like the picture.
- The product should be installed where the vibration and heat is minimum.

İÇ MEKAN / INDOOR



DIŞ MEKAN / OUTDOOR

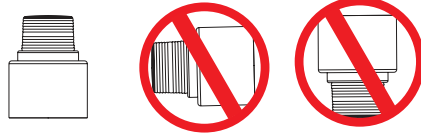

Model	Voltaj/Power Supply	Akım/Current(mA)Max.
SNT-945-SRB	AKÜ / BATTERY 12V 2.2AH/20HR	144mA
CHARGING INPUT	110-220V/AC	

Melodi/Melody	Ses Şiddeti /Sound Intensity(dB) (10cm) Min - Max	Ses Şiddeti /Sound Intensity(dB)(1m) Min - Max
M1	96-110	83-97
M2	94-109	77-96
M3	93-103	76-85
M4	90-104	74-85
M5	92-106	74-88
M6	93-110	79-94
M7	85-104	68-87
M8	94-110	79-96
M9	90-110	75-94
M10	88-103	74-92

* Değerler +/- %5 değişiklik gösterebilir.

* Values may vary by +/- %5.


Model	Ağırlık/Weight	Renk/Color
SNT-945-SRB	1850gr	(1) Kırmızı/Red (2) Yeşil/Green (3) Sarı/Yellow (4) Mavi/Blue (5) Beyaz/White




Epilepsi hastalığı olanların kullanmaması önerilir.
It is recommended that people with epilepsy should not use it.

1


ÖLÇÜLER / DIMENSIONS

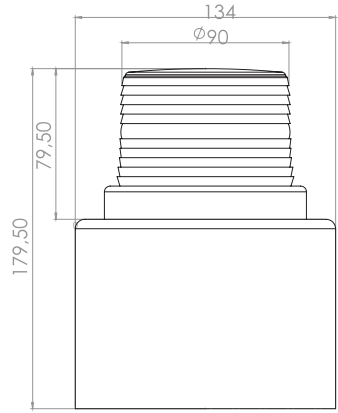

2

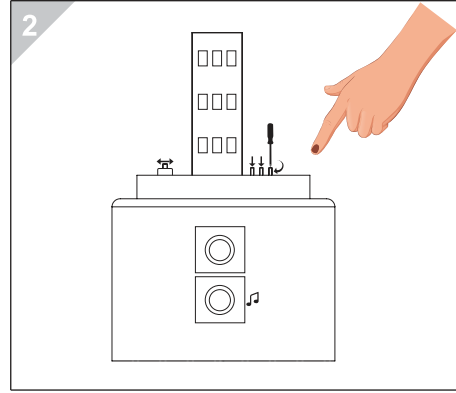

3

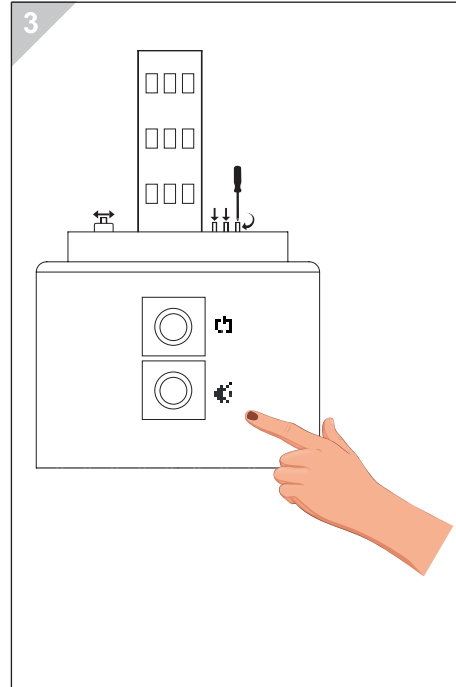

2a

- 🎵 Melodileri değiştirmek için melodi butonuna basıp bırakınız.
- 💡 Işık modunu değiştirmek için ışık butonuna basıp bırakınız.
- 🔊 Potansiyometre modu aktif
- 🔊 Kademeli ses modu aktif (ses seviyesi artarak yükselir)
- VOLUME Potansiyometre ile ses seviyesi belirleme

- 🎵 To change the melodies, press and release the melody button.
- 💡 To change the light mode, press and release the light button.
- 🔊 Potentiometer mode is active.
- 🔊 Gradual sound mode is active.(The sound level rises gradually.)
- VOLUME Adjusting the sound level with potentiometer.

3a

- 🎵 Melodi butonu.
- 💡 ON/OFF Butonu.
- 🎵 Melody button.
- 💡 ON/OFF Button.